

# N range

New models – all relevant UL, CSA, VDE, BS and IEC approvals pending

Up to 5 outputs by power trading to 110 watts

Simple to mount in any format

100% burn-in and ATE/computer tested

Good range of optional features

Available formats: L chassis. Optional mesh cover. Customised enclosure.


Detailed leaflet available

The Farnell N110 multi output series switching power supplies are available in twin, triple, quad or five output configurations.

Maximum output power available is 110 watts so the power trading principle must be applied to the chosen outputs so as not to exceed this. The unit will automatically shut down at around 150% of Pmax.

Built to meet international RFI and safety standards, the units will be submitted for approval during 1986.

Downloaded from  
**Advance Product Services Ltd.**  
 For repairs and replacements, visit  
<http://www.advanceproductservices.co.uk>

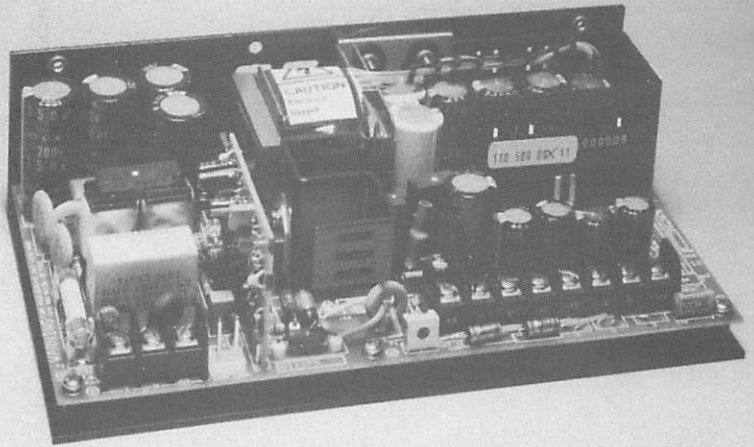

## 110 watts multi output switching power supplies

ORDER CODES	MODEL No.	OUTPUT 1 Vnom.Imax.	OUTPUT 2 Vnom.Imax.	OUTPUT 3 Vnom.Imax.	OUTPUT 4 Vnom.Imax.	OUTPUT 5 Vnom.Imax.
13N110P500	N110P500	+5V 12A	+12V 5A	-12V 2A	-5V 1A	+24V 2A
13N110P501	N110P501	+5V 12A	+12V 5A	-12V 2A	-5V 1A	+24V 2A
13N110P400	N110P400	+5V 12A	+12V 5A	-12V 2A	--	+24V 2A
13N110P401	N110P401	+5V 12A	+12V 5A	-12V 2A	-5V 1A	--
13N110P402	N110P402	+5V 12A	+12V 5A	+12V 3A	--	-12V 2A
13N110P300	N110P300	+5V 12A	+12V 6A	-12V 3A	--	--
13N110P200	N110P200	+5V 12A	+12V 6A	--	--	--

